

PEMSERTER[®] SERIES 4[®] PRESS

The PEMSERTER[®] Series 4[®] press is totally pneumatic providing 6 tons of force and has a 45.7 cm / 18" throat depth which provides clearance for a variety of chassis configurations. It is designed to install self-clinching fasteners in size M2 / #0 thru M10 / 3/8" in steel, and sizes up to M12 / 1/2" in aluminum panels or circuit boards.



Stroke Counter



Laser Pointer



New
Standard
Features



Lockable Tool/Accessories Storage Cabinet

Features and Benefits


- ▶ Insertion force adjustable from 4.5 to 53.4 kN / 1000 lbs. to 6 tons.
- ▶ Pneumatic power for speed, consistency, and simple operation. Requires shop air only.
- ▶ Integral point-of-operation safety.
- ▶ Large parts tray with dividers.
- ▶ Rapid tooling changeover, perfect for short production runs.
- ▶ Laser pointer, stroke counter, and lockable cabinet for tools and accessories storage.
- ▶ One-year parts warranty and two-year limited warranty on pneumatic components.

PEMSERTER® Series 4® Press

Specifications

Ram Force	4.5 to 53.4 kN / 1,000 to 12,000 lbs.
Pressure System Type	Pneumatic / Lever
Air Requirements*	6 to 7 BAR / 90 to 100 PSI 12 mm / 1/2" dia. minimum line flow
Throat Depth	45.7 cm / 18"
Height (on cabinet)	167.6 cm / 66"
Width (of press)	43.2 cm / 17"
Weight	Press - 259 kg / 570 lbs. With Cabinet - 372 kg / 819 lbs.
Cabinet Dimensions	74 cm L x 66 cm W x 76 cm H 29" L x 26" W x 30" H

*1 psi = 0.07 bar. 1 bar = 14.5 psi.

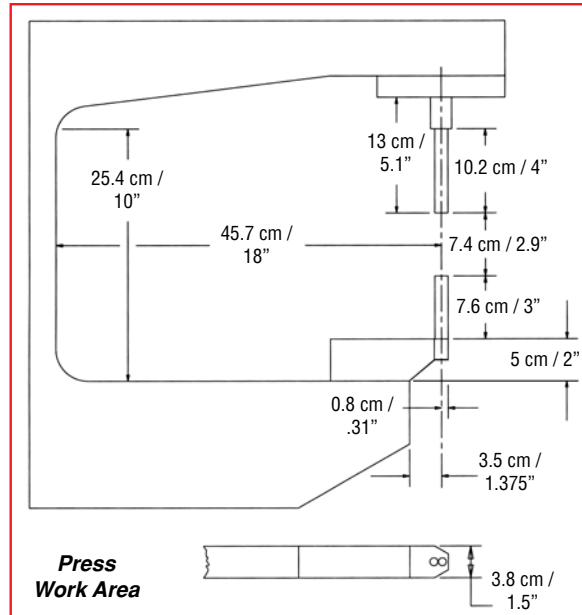

Optional Anvil Holders and Tooling


Optional anvil holders and tooling can be easily installed on all new and existing PEMSERTER® Series 4® presses.



Top Mount Reverse Flange Anvil Holder includes punch and anvil.



Bottom Mount Reverse Flange Anvil Holder.

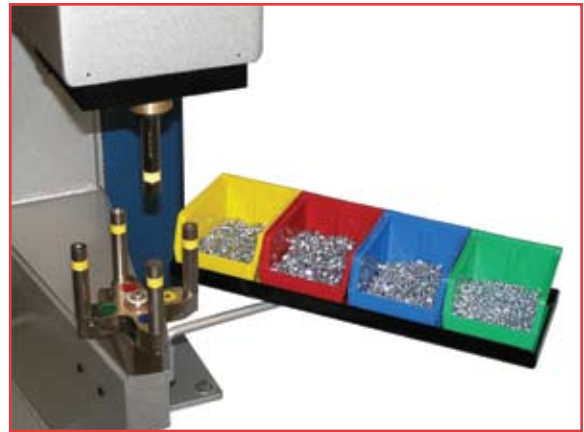

The PEMSERTER® QX4™ manual Turret Tool System provides an efficient method to quickly change between four different anvil tools. The one-handed operation of this tool allows an operator to install four different types and/or sizes of fasteners with one set-up (fastener dependent). For more information see PEM Bulletin QX4 on our web site.

RoHS compliance information can be found on our website.
© 2009 PennEngineering.

Specifications subject to change without notice.
Check our website for the most current version of this bulletin.

PennEngineering®



North America: Danboro, PA USA • E-mail: info@pemnet.com • Tel: +1-215-766-8853 • Fax: +1-215-766-0143 • 800-237-4736 (USA Only)
Europe: Galway, Ireland • E-mail: europe@pemnet.com • Tel: +353-91-751714 • Fax: +353-91-753541
Asia/Pacific: Singapore • E-mail: singapore@pemnet.com • Tel: +65-6-745-0660 • Fax: +65-6-745-2400
Shanghai, China • E-mail: china@pemnet.com • Tel: +86-21-5868-3688 • Fax: +86-21-5868-3988